




Power Take Offs

Ref. TF3008M

ISUZU

MYT – 5T ; MYT – 6S Mechanic control

Main Dimensions

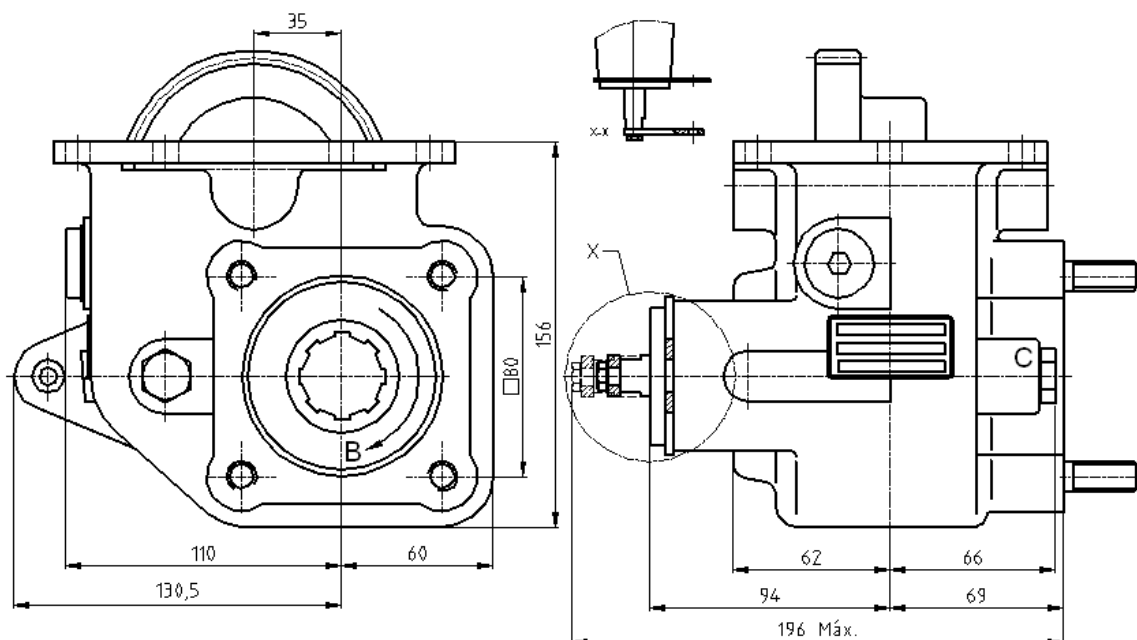

X – Mechanic control

B – Pump rotation

C – Option: Electric sensor with mechanic driving Ref. TF3008MS or TF3008MC

(Dimensions in mm)

Main Data

Continuous Torque (Nm)	300
Intermittent Torque (Nm)	420
Power (at 1000 r.p.m)	42 C.V. / 32 Kw
Mounting Position	Left
Pump Rotation	Left Hand
Weight (Kg)	11.5
PTO internal ratio	1:1
Indicative ratio from motor to PTO's output	1:0,7

CTI TF3008M 1211- 3

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraiagens e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal

Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>

1/1